

Zebra LockJaw™ Manual

Installation & Adjustment Instructions

INSTALLATION

1. Use Figure 1(a-c) to determine the configuration that will be required.
2. Determine the correct hole pattern using Figure 2.
3. Mount the skimmer to the lockjaw using the hardware included.

ADJUSTMENT

1. Close the clamp lever (Figure 3).
2. Loosen both locknuts.
3. Adjust the rubber grips to the wall thickness of the tank or drum.
4. Tighten both locknuts.

Warranty

✓ One year warranty

**If you have any questions
or require product support,
please contact 888-249-4855**

Fig.1a: B-Series/Diverer™/Lockjaw




Fig.1c: ZVA/Diverter/Lockjaw




Fig.1b: B-Series/Lockjaw

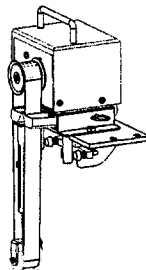


Fig 2: Mounting Holes


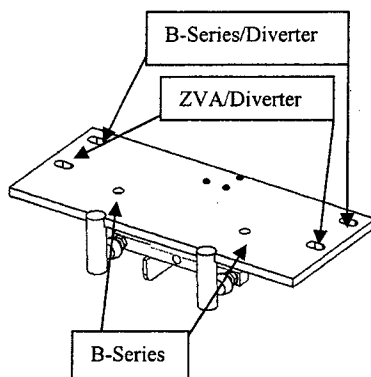


Fig 3: Adjustment



VISIT WWW.COOLANTMAINTENANCE.COM
FOR CLEAN COOLANT TIPS

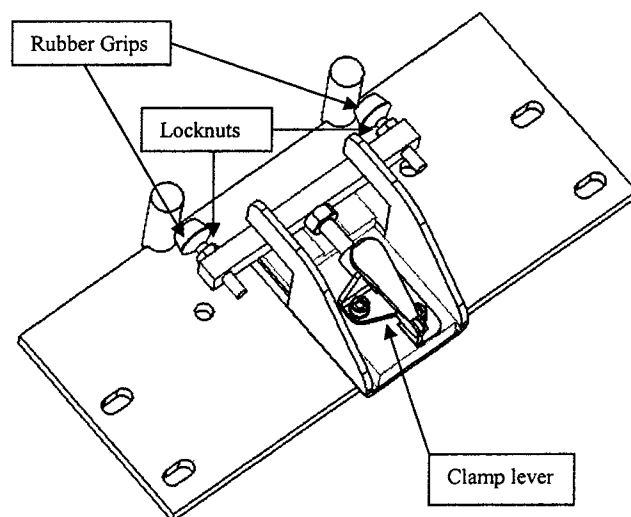

Quality Coolant Performance Products • Skimmers, aerators, mixers, filtration and treatment systems.

© January 2008 Zebra Skimmers Corp • All rights reserved • POBox 833 Chagrin Falls, OH 44022
www.ZebraSkimmers.com • Toll Free 888-249-4855 Phone:440.349.0141 Fax: 440.349.1211