





CONTACT YOUR DISTRIBUTOR
FOR MORE DETAILS

SPECIFICATIONS & PARTS


Zebra Z17 Coalescer

Z17 Series - Technical Specifications


Barrel:	15 gallons (57 liters), 22" (56cm) high, 17" (43cm) diameter
Pump, Standard:	3 gpm (3.8 lpm), w/ max 4' lift, 4" (10cm) high, 3" (7.6cm) wide, 4" (10cm) long
Standard Electrical:	110v, 60Hz standard
Flowrate:	Z17 ships with a blue .125 flow restrictor installed. Two additional flow restrictors (green .25 and orange .5) ship with the unit to facilitate balancing the system to shop conditions.
Hammerhead™:	4.5" (114mm) x 3.25" (82mm) x 1.75" (45mm) w/1' (304mm) oil intake hose (max length), 1 gpm (3.78 lpm) max flow rating
Sumpster™:	5" (127mm) x 4 1/4" (108mm) x 4 5/8" (117mm), 3gpm (11 lpm) max flow rating
Floating Sumpster™:	11" (279mm) x 12" (305mm) x 6" (152mm), 3gpm (11 lpm) max flow rating
Intake Hose:	48" (1.2m) long, 0.5" (12mm) ID (customization available to 15" (4.5m) (max)
Discharge Hose:	48" (1.2m) long, 1.25" (32mm) ID (customization available to 8" (2.4m) (max)
Maximum Temp:	100° F (38° C)
Shipping Weight:	28-31 pounds (12 to 14 kg), dimensional weight, dependent upon model

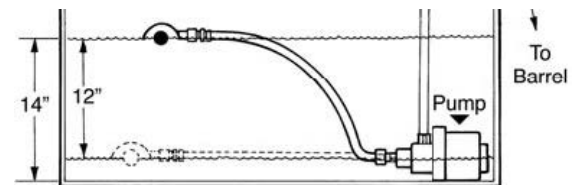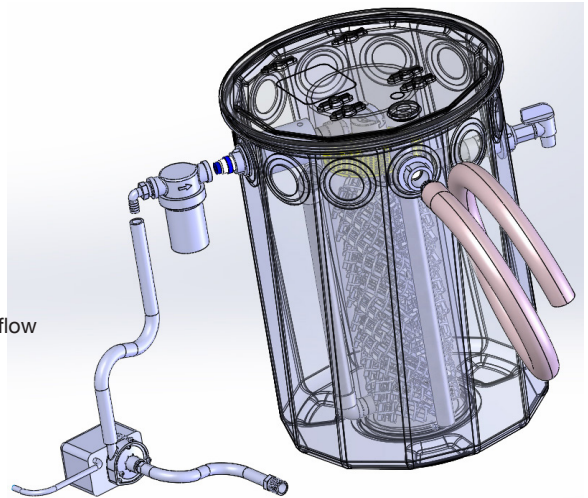

A. HAMMERHEAD
4.5 x 3.25 x 1.75"

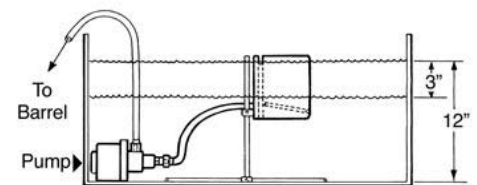

B. SUMPSTER
5 x 4.25 x 4.625"

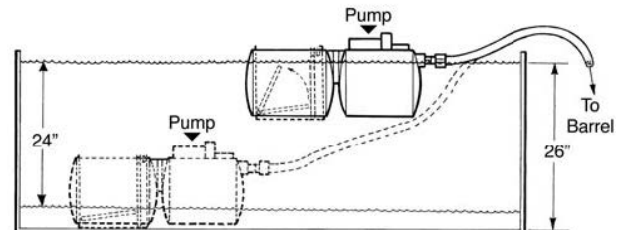

C. FLOATING SUMPSTER
13 x 11 x 7"

Z17 Series - Replacement Parts & Accessories

SK02D12F	Zebra Hammerhead floating skimmer attachment
SK10A7	Zebra Sumpster free-standing skimmer attachment
SK10B2.3S	Zebra Floating Sumpster skimmer attachment
FXDD15	Drum dolly; Polyethylene, 16 3/8" 41.4cm dia., (4) 3" (76mm) dia. casters, 600 lb. (272kg) capacity
FXCM004	Coalescing media (1/2 cubic foot)
SK95	Clear spiral wound, 1.25" ID, 1' section
SK97	Clear braided hose 1/2" ID, 1' section
SK99	Black flexible hose, 1/2" ID, 1' section